

REPARATURSET – FLICKVERFAHREN FÜR GITTER UND TÜREN MIT PVC-BESCHICHTETEM POLYESTERGEWEBE

INHALT

DE

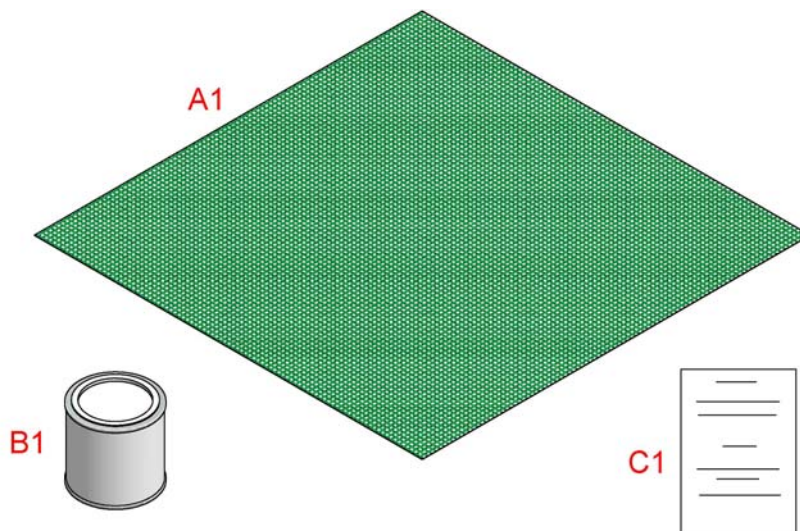


Abbildung 1: Inhalt des Reparatursets

REFERENZ:	ANZ.	PRODUKTBESCHREIBUNG
A1	1	1 Quadratmeter PVC-beschichtetes Material (dem Produkt entsprechend)
B1	1	250 ml Klebstoff des Typs 3206 (speziell auf das Material abgestimmt)
C1	1	Herstellieranweisungen zum Klebstoff 3206

VERFAHREN

1. Messen Sie die Größe des Loches, Risses oder Schnittes. Rechnen Sie 50 mm Überlappung rund um die zu reparierende Stelle hinzu, siehe Abbildung 2. Schneiden Sie einen Flicker in der geeigneten Größe aus A1 aus.

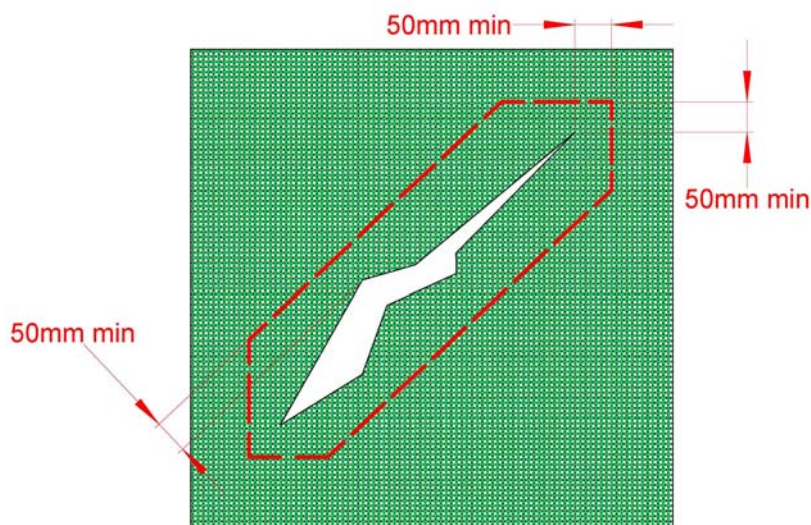


Abbildung 2: Ausschneiden des Reparaturflickens



VORSICHT: Machen Sie sich vor Verwendung des Klebstoffs mit den Herstelleranweisungen vertraut.

2. Tragen Sie den Klebstoff laut Anweisung auf eine Seite des Flickens sowie auf den Bereich um die zu reparierende Stelle auf. Bringen Sie den Flicker an und halten Sie ihn unter gleichmäßigem Druck in Position, bis der Klebstoff ausgehärtet ist.



ACHTUNG: Der zu reparierende Bereich muss vor dem Auftragen des Klebstoffs sauber und trocken sein.

HINWEIS: Dieser Vorgang lässt sich am einfachsten ausführen, wenn dazu das Gitter abgenommen und auf eine ebene, saubere Oberfläche gelegt wird.

Falls Sie weitere Hilfe benötigen, wenden Sie sich bitte telefonisch an Galebreaker Sales unter +44 (0)1531 637900

Cleaner: Use BOSTIK M501 or N (M576) CLEANER/THINNER for surface cleaning, for the removal of surplus adhesive and for cleaning application equipment.

TYPICAL CHARACTERISTICS

Physical Form:	Semi-viscous liquid
Colour:	Clear, slightly amber
Odour:	Predominantly ketone
Chemical Type:	Polyurethane/resin based solution
Solvent:	Mixture of acetone, toluene and methyl ethyl ketone
Viscosity:	3 Pa s (30 poise) approximately
Solids Content:	22% approximately
Specific Gravity:	0.9 approximately
Flammability:	Highly flammable
Flash Point: (Closed Cup)	In the group -18 to -7°C
Temperature Resistance:	-20 to +80°C (-20 to +100°C when cured with BOSTIKURE D).
Water Resistance:	Good
Oil, Petrol & Kerosene Resistance:	Good
Staining:	Generally non-staining but on light coloured, thin PVC very slight staining may occur under extreme conditions. NOTE: Exposed adhesive film turns brown.
Bond Strength:	2.8 MPa (400 psi) in shear, Formica/wood bond.

PACKAGING

Please refer to Customer Service Department for current package sizes.

STORAGE

Store in a dry flameproof area between 5 and 25°C. Keep from freezing.

SHELF LIFE

1 year from date of manufacture, under the above conditions of storage.

MATERIAL SAFETY DATA

For further information refer to the relevant Health and Safety Data Sheet.

This Product Data Sheet covers just one of a large range of products supplied by Bostik Findley Limited. Full information on these products and advice on application is freely available from our fully trained staff throughout the country. In addition, specialist technical advice is available from our Technical Services Department. This Product Data Sheet supersedes all previous technical information on this product, and users of it are cautioned to ensure that it is the current issue. Destroy all previous Product Data Sheets, and if any doubt, contact Bostik Findley Limited, quoting the code number in the top right hand corner on the front of this document. This leaflet is for general guidance only and may contain inappropriate information under particular conditions of use. The company cannot accept any responsibility for loss or damage that may result from the use of this information, due to the possibility of variations of processing or working conditions and of workmanship outside our control. Users are advised to confirm the suitability of this product by their own tests.

Bostik Findley Limited, Ulverscroft Road, Leicester, LE4 6BW England. Tel: +44 (0)1785 272727 Fax: +44 (0)116 253 1943

www.Bostik-Findley.co.uk

SAFETY DATA SHEET

BOSTIK 3206 ADHESIVE

1. IDENTIFICATION OF THE SUBSTANCE/PREPARATION AND COMPANY/UNDERTAKING

PRODUCT NAME: BOSTIK 3206 ADHESIVE

SUPPLIER: BOSTIK FINDLEY LIMITED
COMMON ROAD
STAFFORD. ST16 3EH
STAFFORDSHIRE
Tel: +44 1785 272727
Fax: +44 1785 257236

EMERGENCY TELEPHONES: +44 1785 255141 +44 1785 272650

2. COMPOSITION/INFORMATION ON INGREDIENTS

NAME			CONTENT
CAS No.:	EINECS Nr.:	CLASSIFICATION	
TOLUENE 108-88-3	203-625-9	Xn ,F R-11, 20	10-30 %
BUTANONE 78-93-3	201-159-0	Xi ,F R-11, 36, 66, 67	10-30 %
ACETONE 67-64-1	200-662-2	Xi ,F R-11, 36, 66, 67	10-30 %

The Full Text for all R-Phrases are Displayed in Section 16

3. HAZARDS IDENTIFICATION

Highly flammable. Harmful by inhalation. Irritating to eyes. Repeated exposure may cause skin dryness or cracking.

4. FIRST AID MEASURES

INHALATION: Remove victim immediately from source of exposure. Move the exposed person to fresh air at once. Get medical attention.

INGESTION: DO NOT induce vomiting. Get medical attention immediately.

SKIN: Promptly flush contaminated skin with water. Promptly remove clothing if soaked through and flush the skin with water. Wash skin with soap and water. Get medical attention if irritation persists after washing.

EYES: Rinse the eye with water immediately. Continue to rinse for at least 15 minutes and get medical attention.

5. FIRE FIGHTING MEASURES

EXTINGUISHING MEDIA: Fire can be extinguished using: Powder, foam or CO₂.

HAZARDOUS COMBUSTION PRODUCTS: Fire or high temperatures create: Toxic gases/vapors/fumes of: Carbon dioxide (CO₂). Carbon monoxide (CO).

PROTECTIVE MEASURES IN FIRE: Wear self contained breathing apparatus

6. ACCIDENTAL RELEASE MEASURES

PERSONAL PRECAUTION IN SPILL: Avoid skin and eye contact. Ensure adequate ventilation. Wear personal protective equipment. Wear self contained breathing apparatus. Avoid breathing vapour

PRECAUTIONS TO PROTECT ENVIRONMENT: Prevent entry into drains and water courses.

SPILL CLEANUP METHODS: Stop leak if possible without risk. Extinguish all ignition sources. Avoid sparks, flames, heat and smoking. Ventilate. Provide ventilation and confine spill. Do not allow runoff to sewer. Clean-up personnel should use respiratory and/or liquid contact protection. Wash thoroughly after dealing with a spillage. Absorb in vermiculite, dry sand or earth and place into containers. Should be prevented from entering drains. Collect spillage in containers, seal securely and deliver for disposal according to local regulations. Containers with collected spillage must be properly labelled with correct contents and hazard symbol.

7. HANDLING AND STORAGE

USAGE PRECAUTIONS: Keep away from heat, sparks and open flame. Avoid spilling, skin and eye contact. Ventilate well, avoid breathing vapours. Use approved respirator if air contamination is above accepted level.

STORAGE PRECAUTIONS: Flammable/combustible - Keep away from oxidizers, heat and flames. Ground container and transfer equipment to eliminate static electric sparks. Store at moderate temperatures in dry, well ventilated area.

STORAGE CRITERIA: Flammable liquid storage.

8. EXPOSURE CONTROLS AND PERSONAL PROTECTION

INGREDIENT NAME:	CAS No.:	STD	LT EXP 8 Hrs	ST EXP 15 Min
BUTANONE	78-93-3	OES	200 ppm(Sk)	300 ppm(Sk)
ACETONE	67-64-1	OES	500 ppm	1500 ppm
TOLUENE	108-88-3	OES	50 ppm(Sk)	150 ppm(Sk)

PROTECTIVE EQUIPMENT:



VENTILATION:	Explosion-proof general and local exhaust ventilation.
RESPIRATORS:	Respiratory protection must be used if air concentration exceeds acceptable level. Wear mask supplied with: Gas cartridge (organic substances).
PROTECTIVE GLOVES:	Protective gloves must be used if there is a risk of direct contact or splash. Use protective gloves made of: Nitrile.
EYE PROTECTION:	Wear splash-proof eye goggles to prevent any possibility of eye contact.
OTHER PROTECTION:	Wear appropriate clothing to prevent repeated or prolonged skin contact.
HYGIENIC WORK PRACTICES:	Wash promptly if skin becomes contaminated. Wash at the end of each work shift and before eating, smoking and using the toilet.

9. PHYSICAL AND CHEMICAL PROPERTIES

APPEARANCE:	Liquid.
COLOUR:	Lightly coloured.
ODOUR/TASTE:	Organic solvents.
SOLUBILITY DESCRIPTION:	Insoluble in water.

10. STABILITY AND REACTIVITY

STABILITY:	Avoid: Heat, sparks, flames.
-------------------	------------------------------

11. TOXICOLOGICAL INFORMATION

INHALATION:	Harmful by inhalation. May cause sensitisation by inhalation.
INGESTION:	May cause discomfort if swallowed.
SKIN:	Prolonged or repeated contact leads to drying of skin. May cause sensitisation by skin contact.
EYES:	Irritating to eyes.
HEALTH WARNINGS:	May cause irritation to the respiratory system. May cause respiratory allergy. Acts as a defatting agent on skin. May cause cracking of skin, and eczema.
MEDICAL CONSIDERATIONS:	History of smoking. Allergies.

12. ECOLOGICAL INFORMATION

ECOLOGICAL INFORMATION:	Contamination of the terrestrial and aquatic environments should be avoided
--------------------------------	---

13. DISPOSAL CONSIDERATIONS

DISPOSAL METHODS: Dispose of in accordance with Local Authority requirements.

14. TRANSPORT INFORMATION

LABEL FOR CONVEYANCE:



UK ROAD TRANSPORT CLASS:	3
UK ROAD PACK GR.:	III
ADR CLASS No.:	3
ADR CLASS:	Class 3: Flammable liquids.
ADR PACK GR.	III
ADR LABEL No.:	3
HAZCHEM CODE:	3Y
CEFIC TEC(R) No.:	30GF1-III,30GF1-sp
PROPER SHIPPING NAME I:	ADHESIVES
RID CLASS No.:	3
RID PACK GR.	III
UN No. SEA:	1133
IMDG CLASS:	3
IMDG PACK GR.:	III
EmS No.:	3-05
MFAG TABLE No.:	See Guide
MARINE POLLUTANT:	No.
UN No., AIR:	1133
ICAO CLASS:	3
AIR PACK GR.:	III

15. REGULATORY INFORMATION

LABEL FOR SUPPLY:

**CONTAINS**

TOLUENE

RISK PHRASES:

R-11 Highly flammable.
 R-20 Harmful by inhalation.
 R-36 Irritating to eyes.
 R-42/43 May cause sensitisation by inhalation and skin contact.
 R-66 Repeated exposure may cause skin dryness or cracking.

SAFETY PHRASES:

P-4 Contains isocyanates. See information supplied by the manufacturer.
 S-16 Keep away from sources of ignition - No Smoking.
 S-23 Do not breathe gas/fumes/vapour/spray.
 S-24/25 Avoid contact with skin and eyes.
 S-26 In case of contact with eyes, rinse immediately with plenty of water and seek medical advice.
 S-37 Wear suitable gloves.
 S-38 In case of insufficient ventilation, wear suitable respiratory equipment.
 S-45 In case of accident or if you feel unwell, seek medical advice immediately (show the label where possible).
 S-60 This material and its container must be disposed of as hazardous waste.
 S-9 Keep container in a well-ventilated place.

16. OTHER INFORMATION

USER NOTES:

This product should be used as directed by Bostik Findley Ltd. For further information consult the product data sheet or contact Technical Services.

INFORMATION SOURCES:

This safety data sheet was compiled using current safety information supplied by distributor of raw materials.

REVISION COMMENTS:

This safety data sheet supersedes all previous issues and users are cautioned to ensure that it is current. Destroy all previous data sheets and if in doubt contact Bostik Findley Limited.

ISSUED BY:

Approved EC

REVISION DATE:

March 2004

REV. No./REPL. SDS GENERATED:

1

DATE:

March 2004

PRINTING DATE:

2004-03-08

R-PHRASES (Full Text):

R-11 Highly flammable. R-20 Harmful by inhalation. R-36 Irritating to eyes. R-66 Repeated exposure may cause skin dryness or cracking. R-67 Vapours may cause drowsiness and dizziness.